

800 MHz Stainless Steel Yagi Antennas

540-1000 MHz


YBS806 Series



The stainless steel YBS806 series yagis are high gain Low PIM antennas specifically designed to cater for extreme and corrosive environments. They provide an excellent solution for point to point applications in RF control, short or long haul link, point to multipoint and other applications requiring highly directional antennas.

Manufactured from all welded 316 grade stainless steel these antennas provide identical performance to the YB806 series yagis but are better suited for extreme climatic or corrosive applications.


Termination is via an N female connector fitted to a short 9302 Durathene cable tail. Durathene is a PTFE dielectric and polyethylene jacketed cable providing superior resistance to weathering and abrasion and is less susceptible to bird attack than standard PVC sheathed cables.

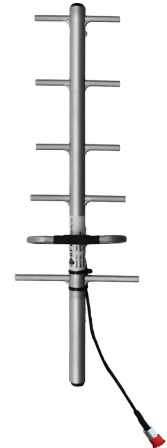


Features:

- Rugged construction 316 grade stainless steel for extreme conditions
- Narrow beamwidth and high front to back ratios
- Can be configured in stacks or bays for higher gain applications using PH and PHE series phasing harnesses
- Ideal for point to point or point to multipoint applications
- DC grounding on all elements for the ultimate in lightning protection and dissipation of static noise


Typical VSWR response (YBS806-94)



YBS806-94 - E Plane



YBS806-94 - H Plane



Electrical

Model Number	YBS806-81	YBS806-82	YBS806-94	YBS806-99
Nominal Gain dBi (dBd)	11 (9)			
Frequency MHz	806 - 896	850 - 930	890 - 960	540 - 1000
Tuned Bandwidth	Full band			5%
VSWR (Return Loss)	<1.5 :1 (14dB)			
Nominal Impedance Ω	50			
Vertical Beamwidth°	49	50		
Horizontal Beamwidth°	61	62		
Front / Back Ratio dB	22	20	15	17
Input Power W	100			

Mechanical

Model Number	YBS806-81	YBS806-82	YBS806-94	YBS806-99
Construction	All welded stainless steel with polished finish			
Length m	0.6			0.8
Weight kg	0.7	0.7	0.7	1.0
Termination	N female with short 9302 cable tail			
Mounting Area	100mm of 25mm diam. stainless steel			
Suggested Clamps	1 x UNV			
Projected Area cm ²	No ice	228	236	211
	With ice	584	597	543
Wind Load (Thrust) @ 160km/h N	27	28	25	43
Wind Gust Rating km/h	>240			
Torque @160 km/h Nm	5	6	4	13