

Directional Panel Antennas

746-960 MHz

BPA7496-15




The BPA series panel antennas provide excellent gain with a range of directional radiation patterns, ideal for coverage requirements in “corridor” and sectorised applications. These panel antennas are fully enclosed to aid installation, provide waterproofing, and to resist bird attack. The main lobe of these antennas is strong, offering excellent beam control, upper side lobe suppression and front to back ratio, ensuring the integrity of the pattern.

Proven design and construction techniques provide not only excellent radiation characteristics but also high levels of intermodulation and noise suppression. IM performance is -150dBc based on a two-carrier test. The antenna rests at ground potential and offers excellent lightning protection and reduced precipitation noise.

Features:

- Ideal for highly populated sites requiring “corridor” or sectorised coverage
- Choice of 60° 120° or 180° beamwidth models
- Industry leading PIM ratings (-150dBc) providing low IM and low noise characteristics
- 25kW Peak instantaneous (PIP) rating
- Convenient mounting style suits various pole, mount and wall installation locations
- Manually adjustable electrical tilt (MET)
- DC grounded for superior lightning protection

Radiation Patterns

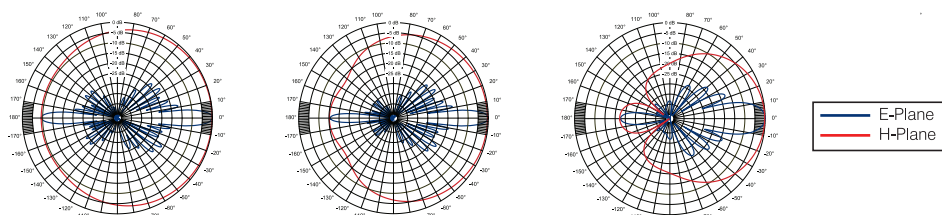

BPA-7496-180-14

BPA7496-120-15

BPA7496-60-15



Electrical Specifications

Model Number	BPA7496-180-14	BPA7496-120-15	BPA7496-60-15
Nominal Gain dBi (dBd)	14 (12)		15 (13)
Frequency MHz		740-960	
Tuned Bandwidth MHz		Entire Band	
Polarity		Vertical	
VSWR (Return Loss)		<1.5:1 (14dB)	
Nominal Impedance Ω		50	
Downtilt		0° to 8° adjustable	2° to 16° adjustable
Vertical Beamwidth°		7	14
Horizontal Beamwidth°	170±10	120±10	60±5
Upper Side Lobe Suppression dB		<-16	
Front to back Ratio dB	≥7	≥12	≥24
Input Power W		500	
Passive IM 3rd order dBc		<-150	
Peak Instantaneous Power kW		25	

Mechanical Specifications

Model Number	BPA7496-180-14	BPA7496-120-15	BPA7496-60-15
Construction		Fully enclosed in radome	
Length x Width x Depth mm (inches)	2825 x 265 x 145 (111 x 10.4 x 6)		900 x 265 x 145 (35.4 x 10.4 x 6)
Weight kg (lbs)	17 (38)		8 (17)
Weight (Packed) kg (lbs)	20 (44)		16 (35)
Termination		1 x DIN female	
Clamps (Provided)		Mechanical downtilt stle (0-8°)	
Clamps Diameter mm (in)		Ø70 to Ø120 (Ø2.8 to Ø4.7)	
Wind Load @ 150km/h N Frontal/Lateral/Rearside	810/443/810		438/239/438
Max. Wind Velocity km/h	210		210