

Site Vantage® features enhanced and modern hardware and software architecture designed to support new innovative RF monitoring capabilities. These include, but are not limited to, fast monitoring of forward and reflected transmitted power per channel, measuring Tx to Rx antenna isolation, and monitoring Rx RSSI levels for 80 channels or more. Site Vantage® also boasts a broadband monitoring capability, allowing for RF monitoring in dual or multiband sites using a single device.

With three separate forward and reflected paired power inputs, as well as three separate receive monitoring inputs, the Site Vantage® enables monitoring of multiple transmit combiners and antennas, while also supporting Rx diversity systems or a standalone monitoring antenna, all within one device.

The advanced architecture paves the way for the addition of even more advanced software features in the future, enabling automated periodic RF site maintenance and facilitating remote troubleshooting and fault finding.

Whilst Site Vantage® is compatible with the existing Site Alarm Module (SAM), it also features on-board analogue and digital Inputs as well as Alarm outputs.

Furthermore, the Graphical User Interface (GUI) has been completely overhauled to enhance the user experience through ease of setup and improved data visualisations.



Key Features:

- Enables remote and automated RF site monitoring and fault finding to minimise on-site maintenance and operational costs.
- Non-intrusive and channelised monitoring of Tx forward and reflected power, VSWR as well as per timeslot Rx RSSI and Rx Noise Floor in multi-channel, digital and analogue LMR systems.
- Advanced RF tests to monitor the antenna isolation, Tx filter noise suppression and Rx system carrier rejection.
- Broadband operation supporting frequencies from 132 to 960MHz.
- Fast channel scan rates.
- Three paired FWD and REV inputs and three Rx inputs.
- Broad input voltage range from 12 to 60VDC.
- Advanced cyber security features.
- Supports https and SNMP v3 protocols.
- Integrated Analogue/Digital Inputs and Alarm Relay Outputs.
- Hardware is ready for future advanced RF monitoring software features.
- Onboard RF Test and Signal Generator ports for easier on-site troubleshooting.
- Roadmap optional features include Open API access, Receive Antenna VSWR, Receiver De-sense Detection and Spectrum Analyser.

Technical Specifications

| Model Number | | SV1396 |
|---|---|---|
| Frequency range <i>MHz</i> | | 132-960 |
| Maximum number of monitored channels | | 80 |
| Available Tx FWD and REV power monitoring input ports | | 3 |
| Measured RF Parameters | | Tx Forward Power per channel Tx Reflected Power per channel Rx Level per channel and per timeslot Rx Composite level Rx noise floor per channel |
| Supported RF Tests | | Tx to Rx antenna isolation Rx Gain Measurement Tx Rejection |
| Rx monitoring port input range <i>dBm</i> | | -125 to -50 |
| Channel measurement bandwidths <i>kHz</i> | | 6.25, 12.5, 20 and 25 |
| RF Measurement Accuracy (typ.) <i>dB</i> | | ± 1 (subject to calibration) |
| Conducted emissions | | Complies with FCC Part 15 (15.207) |
| Radiated emissions | | Complies with FCC Part 15 (15.209) |
| RF Termination connectors | | Tx (FWD & REV) Ports: 4.3-10(F), Rx Ports: BNC (F) Test, 10MHz REF and Sig Gen Ports: BNC(F) |
| Communication interface port | | 1 x front mounted, and 2 x rear mounted TCP/IP Ethernet ports (RJ45) |
| Site Alarm Module (SAM) Interface | | Rear mounted DB9(M) |
| Programmable Inputs and Outputs | | 4 x Inputs (Digital, Voltage and Temperature Sensor Inputs) 4 x Alarm / Logic Relay Outputs |
| Visual alarm notification | | Front panel mounted LED |
| Configurable alarms | | Summary Fault/ Tx FWD power / VSWR / RSSI (Ant Isolation) |
| Alarm reporting | | SNMP v1, v2c and v3 Relay outputs |
| Power supply | | 12-60VDC or 100-240VAC with optional plug-pack |
| DC power connector | | Polarised 2-pin Phoenix connector |
| Power consumption (typ.) <i>W</i> | | 35 |
| Mounting | | 1RU 19" rack mounting |
| Net Dimensions (incl connectors) <i>mm / in</i> | H | 43.6 / 1.71 |
| | W | 483 / 19 |
| | D | 239.7 / 9.43 |
| Net Weight (maximum) <i>kg / lb</i> | | 4.2 / 9.25 |
| Environmental Rating | | IP20 |
| Operational temperature range °C / F | | -30° to +60° / -22° to 140° |
| Compliance | | FCC Part15 IEC 61000.6.1, IEC 610006.33, IEC/EN 62368-1 AS/NZS 62368.1:2022, AS/NZS CISPR32 :2015 AMD 1:2020 RoHS |

Antenna Line Coupler Specifications

| Model Number | | SPxxx-y440-43FF1RU | | |
|--|--------------------|-----------------------------|---------------------|---------------------|
| Model Number Frequency Derivative (SPxxx) | | SP1318-2440-43FF1RU | SP3855-4440-43FF1RU | SP7496-4440-43FF1RU |
| Frequency Range <i>MHz</i> | | 130-180 | 380-550 | 746-960 |
| Insertion Loss (max) <i>dB</i> | | 0.05dB | | |
| Input and Output Return Loss (min) <i>dB</i> | | 20 | | |
| VSWR (max) | | 1:1.2 | | |
| Directivity <i>dB (min)</i> | | 27 | | |
| Coupling Loss <i>dB</i> | | 40dB (+/- 0.7) | | |
| Input Power (max) <i>W</i> | | 750 | | |
| Peak Instantaneous Power (max) <i>kW</i> | | 16 (+72dBm) | | |
| PIM 3rd OIP - 2 x 43 dBm carriers (min) <i>dBc</i> | | -140dBc | | |
| Connectors - “To Antenna” / “From Combiner” | SPxxx-y440-43FF1RU | 4.3-10(F) | | |
| Connectors - FWD and RFL coupling ports | | N(F) | | |
| Mounting | | 1RU 19” rack mounting | | |
| Net Dimensions <i>mm / in</i> | H | 43.60 / 1.71 | | |
| | W | 483 / 19 | | |
| | D | 77 / 3 | 135 / 5.31 | |
| Operational temperature range °C / F | | -30° to +60° / -22° to 140° | | |
| Compliance | | RoHS | | |

SV1396 Ordering Information

| RFI Model Number | Description |
|------------------|---------------|
| SV1396 | Site Vantage® |

Antenna Line Couplers

| RFI Model Number | Description |
|---------------------|--|
| SP1318-2440-43FF1RU | Antenna Line Coupler,130-180MHz, 40dB, 4.3-10 (F) In /Out, N(F) Coupling Ports, 750W, 1RU |
| SP3855-4440-43FF1RU | Antenna Line Coupler, 380-550MHz, 40dB, 4.3-10 (F) In /Out, N(F) Coupling Ports, 750W, 1RU |
| SP7496-4440-43FF1RU | Antenna Line Coupler, 740-960MHz, 40dB, 4.3-10 (F) In /Out, N(F) Coupling Ports, 750W, 1RU |

Optional Site Alarm Module


| RFI Model Number | Description |
|------------------|---|
| SAM0000 | Site Alarm Module, 9-36 VDC |
| SAM0000-48 | Site Alarm Module, 36-60 VDC |
| SAM0000-TS | Site Alarm Module, Temperature Sensor c/w 15ft / 5m cable |
| SAM0000-CK | Site Alarm Module, Connector Kit, 10 x 2way / 10 x 3way / 1 x 8way connectors |

Accessories

| RFI Model Number | Description |
|------------------|--|
| ASM0048AU-AC | Plugpack 90-264VAC 48VDC c/w 6ft/1.8m AU IEC Power Cable |
| ASM0048US-AC | Plugpack 90-264VAC 48VDC c/w 6ft/1.8m US IEC Power Cable |

Application Diagram

Site Vantage® + Antenna Line Coupler

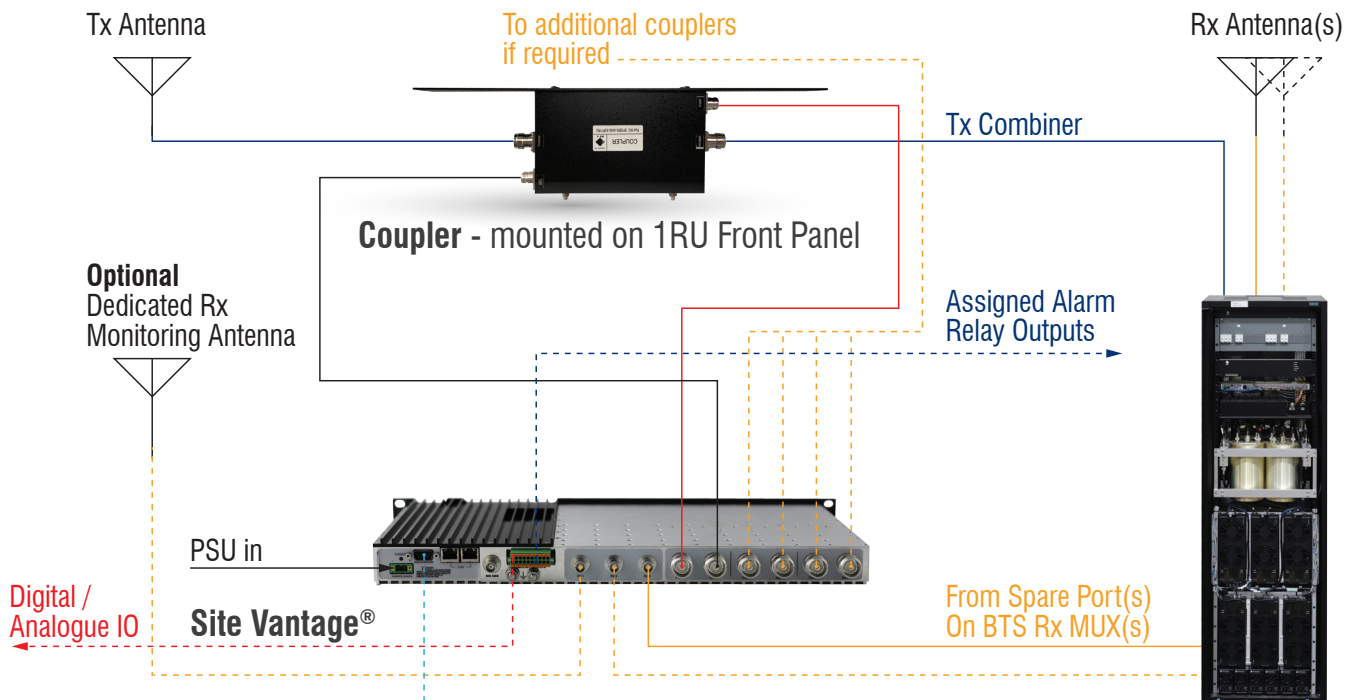

Optional SAM(s)

